



## LinxSeries® 4900

Continuous InkJet Printing

Inkjet  
Technology by




## Dimensions:

Front Elevation



Top Elevation

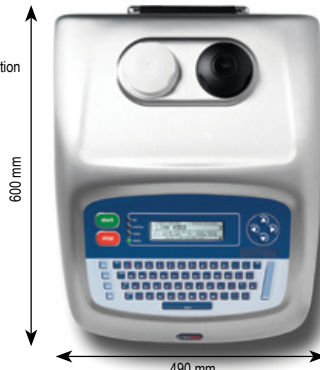

Side Elevation



## Printer Specifications:

Printhead with 2M Conduit, Standard	MK7
Printhead/Conduit Options	4M, 90D
Max Lines of Print	2
Character Height Range	0.08" to 0.30"
Max Speed; Single Line Print	1230 fpm
Ink Range	Dye Based
Automatic Date Codes, Sequential Numbering	Yes
Timed Messages	Yes
Graphics/Logo Printing	No
Barcodes, Common	
Linear & 2D Datamatrix	No
Memory Capacity (# of Messages)	50
Ingress Protection Rating	IP55
Base and Enclosure	Stainless Steel
Operating Temperature Range	41-113°F
Humidity Range (r.h., Non-Condensing)	90% Max
Power Supply	100-230V 50/60 Hz
Power Consumption	200W
Weight	46.3-52.9 lbs
Regulatory Approvals	TÜV/GS, CE Mark, FCC, RoHS

## Connections / Interfacing Specifications:

Logojet PC Based Message and Logo Creation Software and DDE Driver Software	Optional
RS232 Port	Yes
Ethernet Option	No
Parallel I/O Option	No
USB Port for Message and Printer Setting Back Up and Restore	No
Shaft Encoder, Product Detector, External Single Stage Alarm, Volt-Free Contact Alarm Connection	Yes

## Features and Benefits:



- **Single Button** startup and shutdown.
- **IP55 washdown rating** is perfect for food, beverage and dairy packaging plants where washdown and harsh environments are demanding on equipment.
- **Prints up to 2 lines of alphanumerics** on virtually any material due to a broad range of LINX inks.
- **Production line speeds** up to 1,230 feet/minute.
- **Simple menu-driven interface** allow for message preview for error free code creation.
- **Sealed robust printhead** requires no manual adjustments and removes the risk of damage to critical components.
- **Self-cleaning printhead and automatic power down** allows for trouble free start-ups and stops.
- **Small compact design** allows for quick and easy installation and mobility.
- **Stainless Steel Case** has no dirt traps and provides a surface which liquid naturally slides off.
- **No need to stop or open the printer to refill** so production is not disrupted.

## Distributor Information:

